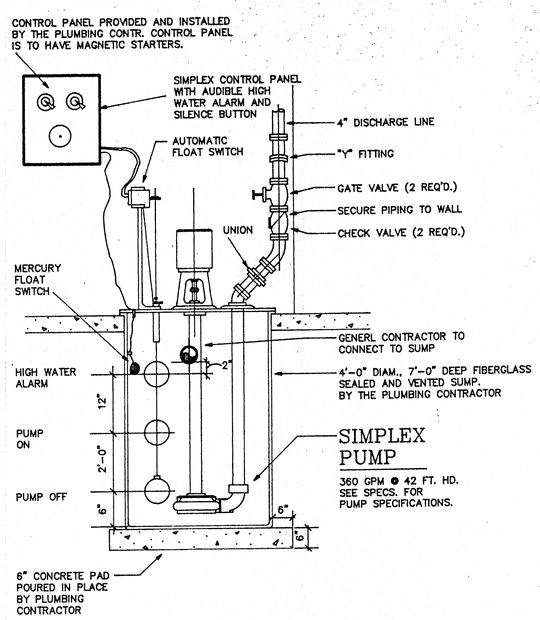

SANITARY EJECTOR PUMP DETAIL

NO SCALE

PLUMBING LEGEND

TAG	DESCRIPTION
———	UNDERGROUND SANITARY SEWER
— — —	UNDERGROUND STORM SEWER
———	WASTE PIPING (ABOVE FLOOR)
— — — —	VENT PIPING
—CW—	COLD WATER
—HW—	HOT WATER
—HWR—	HOT WATER RETURN
—T—	TEMPERED WATER
—RC—	RAIN CONDUCTOR PIPING
—X—X—X—	EXISTING PIPING TO REMAIN
—\\—\\—	EXISTING PIPING TO BE SITE CLEARED
—⋈—	BALL VALVE
—▶—	CHECK VALVE
—○	TRAP
UP ○ ○ DOWN	PIPE RISERS
—DT—	DRAIN TILE (BY GENL CONTR)
C.O.	CLEANOUT PLUG
V.T.R.	VENT THRU ROOF
V.I.F.	VERIFY IN FIELD
T.O.F.	TOP OF FOOTING
B.O.F.	BOTTOM OF FOOTING
RC	RAIN CONDUCTOR

PLUMBING FIXTURE SCHEDULE

TAG	DESCRIPTION	MAKE & MODEL	SUPPLY	STOPS	TRAP	DRAIN	MOUNTING HGT.	MISC. EQUIPMENT AND REMARKS
WC-1	WATER SAVER TANK WATER CLOSET WALL OUTLET	KOHLER (WHITE) K-4330	SLOAN ROYAL 116	PART OF SUPPLY			16" SEAT HGT.	BEMIS 1955-SS-C (WHITE) SEAT. PROVIDE INSULINER
WC-2	BARRIER FREE, HIGH-LINE F.V., FLR. OUTLET	KOHLER (WHITE) K-436BET	SLOAN ROYAL 116	PART OF SUPPLY	INTEGRAL		19" SEAT HGT.	BEMIS 1955-SS-C (WHITE) SEAT. PROVIDE INSULINER
L-1	VANITY LAVATORY W/ 4" METERING FAUCET (TEMPERED WATER)	KOHLER (WHITE) K-2195	BRADLEY 90-75	FROST 7802-2	FROST 5036-2 1 1/4"	PERF.	COUNTER TOP	
L-2	WALL HUNG W/ METERING FAUCETS (4" O/C")	KOHLER (WHITE) K-2032	BRADLEY 90-75	FROST 7802-2	FROST 5036-2 1 1/4"	PERF.	33" TO RIM	
EVC-1	BARRIER FREE ELECT. WATER COOLER	ELKAY * EBFS-8		FROST 7802-2	1 1/4" PVC TRAP	PART OF UNIT	36" TO THE SPOUT	
MB-1	24 X 24 MOP BASIN	MUSTEE 63	CHICAGO 782-IS	PART OF SUPPLY	3" P-TRAP	PART OF UNIT	FLOOR	INSTALL SCREW ON VAC. BRKR. @ OUTLET
FD-1	3" FLOOR DRAIN	ZURN Z-415			3" P-TRAP			
HB-1	INTERIOR HOSE BIBB	WOODFORD 24P						VAC. BRKR. REQ'D @ OUTLET
SH-1	SHOVER 1-HEAD (TEMPERED WATER)	BRADLEY 1WCA-6'-0"-TF-SH						6'-0" HEAD HEIGHT - 2.5 GPM FLOW
SH-2	SHOVER 3-HEAD (TEMPERED WATER)	BRADLEY 1WCA-6'-0"-TF-SH						6'-0" HEAD HEIGHT - 2.5 GPM FLOW
TCV-1	THERMOSTATIC CONTROL VALVE	SYMMONS TEMPTROL 5-400A-W-RC						
FCO	FLOOR CLEANOUT	ZURN ZN-1405						
WCO	WALL CLEANOUT	ZURN Z-1445-1						
RD-1	ROOF DRAIN	ZURN 100-ERC						

FIXTURE NOTES:

* DENOTES COLOR WHICH IS TO BE SELECTED BY THE ARCHITECT

** USE A 1/2" BALL VALVE WITH ESCUTCHEON IN LIEU OF USING A MAUFACTURED SUPPLY WITH STOP.

PLUMBING EQUIPMENT SCHEDULE

HOT WATER RETURN PUMP	GRUNDFOS MODEL UP25-64SF, 3 GPM @ 20 FT. HD. 1/12 HP, 120 V. - 1 PH.

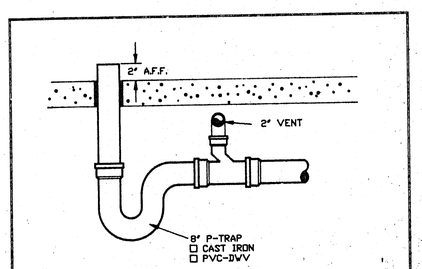

HUB DRAIN DETAIL

NO SCALE

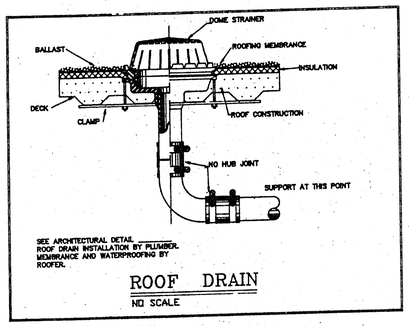

ROOF DRAIN

NO SCALE

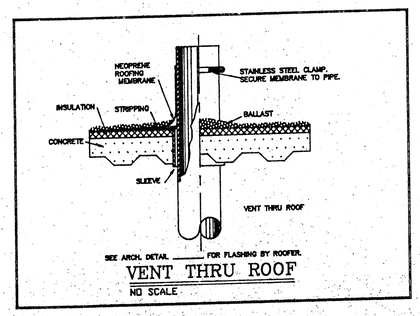

VENT THRU ROOF

NO SCALE

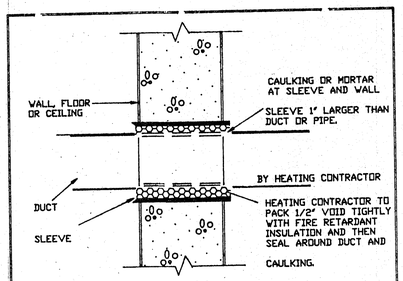

DUCT SLEEVE DETAIL

NO SCALE

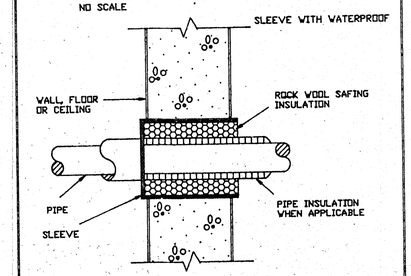

PIPE SLEEVE DETAIL

NO SCALE

SIKORA ENGINEERING,
MECHANICAL/ELECTRICAL
978 LAKEVIEW
GREEN BAY, WISCONSIN 54313
1-414-434-0240

SEABORG ASSOCIATES
ARCHITECTS
2012 10th St. Menominee, MI. 49858 - Ph.(906) 863-2694

SWIMMING POOL ADDITION
UNIVERSITY / YMCA CENTER
UW - MARINETTE COUNTY
MARINETTE, WISCONSIN

DR.	CK.
DATE	
JOB NO.	
SHEETS	
SHEET NO.	P-3